

Wavin

Product Installation Guide

AquaCell

Stackable System



wavin

An Orbia Building &
Infrastructure business.

AquaCell Installation Guide

General characteristics

AquaCell is a below ground storm water storage system which can be used in different applications namely as:

1. Retention / Infiltration Systems


Objective: temporary storage to allow the gradual infiltration of water into the soil.

Solution: Wavin AquaCell wrapped in a non-woven geotextile.

2. Detention / Water Reuse Systems

Objective: temporary or permanent water storage and management meant to return the water to the existing network or implement for use in irrigation or landscape maintenance.

Solution: Wavin AquaCell covered in a 30 mil geomembrane liner, which is protected by a non-woven geotextile around it.

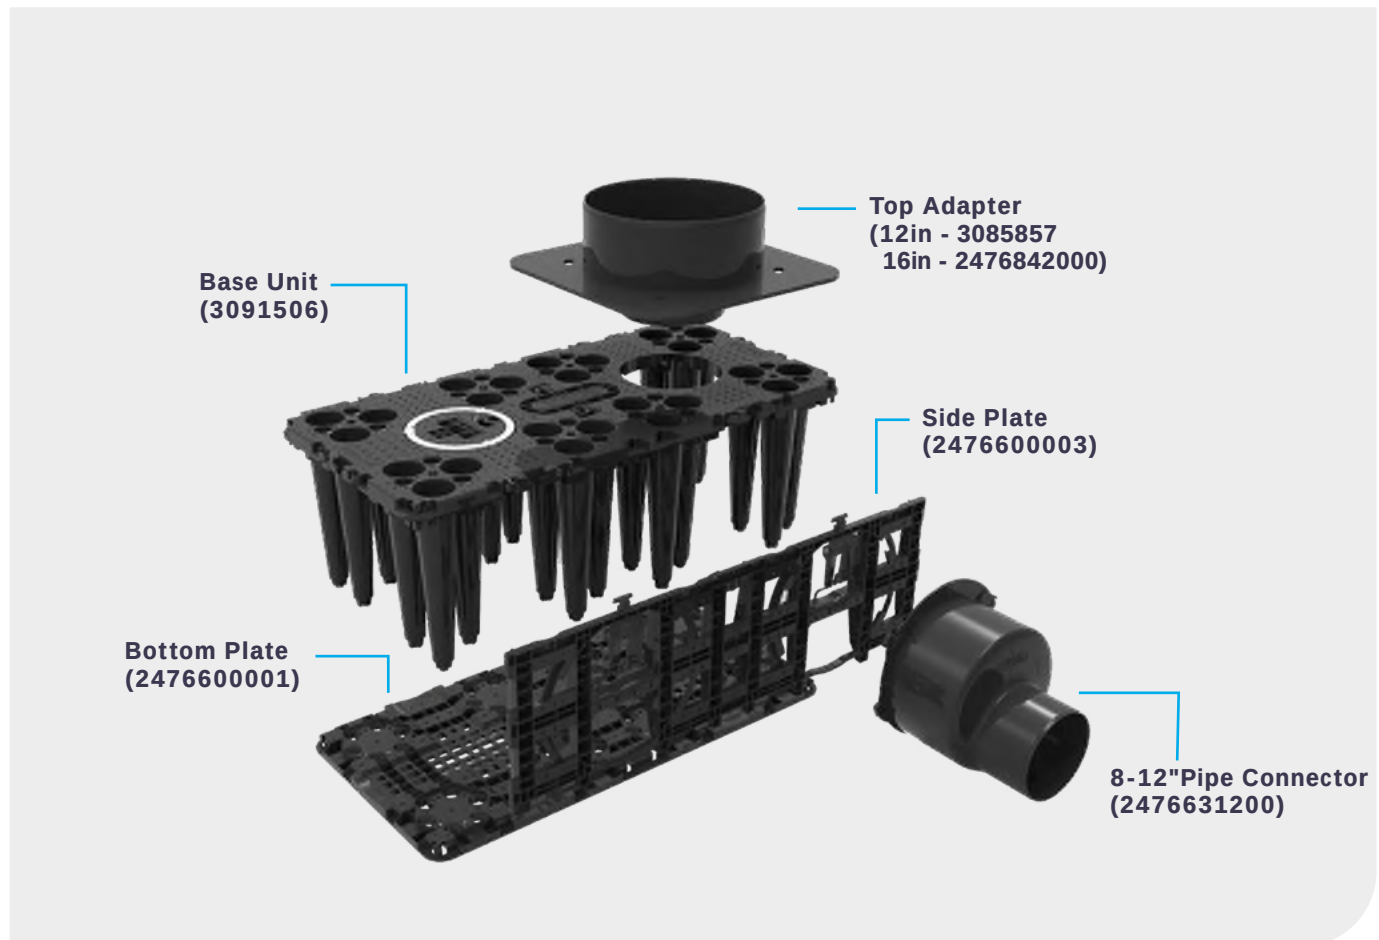

Technical Specifications



General	Raw material	100% recycled polypropylene	
	Color	Black	
	Vertical inspection access	10in	
Base Unit	Dimensions (Length x Width x Height)	47.2 in x 23.6 in x 16.7 in	
	Gross volume with baseplate attached	81 gal / 10.81 cf	
	Net volume with baseplate attached	77 gal / 10.25 cf	
	Void Rate (Varies by layer/side plates added)	94% - 96%	
	Weight	24lbs	
Bottom Plate	Pipe Connections	6in, 8in, 10in, 12in	
	Dimensions (Length x Width x Height)	47.2 in x 23.6 in x 16.7 in	
	Weight	8 lb	
Side Plate	Dimensions (Length x Width x Height)	45.5 in x 15.2 in x 2 in	
	Weight	5 lb	
Top Adaptor (Inspection and Maintenance)	Dimensions	10/12in.	
	Weight	3lbs	
	Dimensions	10/16 in.	
	Weight	11lbs	
Connection Adaptor 8in - 12in	Dimensions (Length x Width x Height)	14 in x 14 in x 12 in	
	Weight	3lbs	
Minimum Cover Depth(d) Maximum Cover Depth(H)	Type of load	Standard (SC)	Extra Strong (EX)
	H-10 Traffic Loading [in/ft]	d=12 in. / H= 14.4 ft	d=12 in. / H=26.2 ft
	HS-20 Traffic Loading [in/ft]	d=24 in. / H=14.4 ft	d=18 in. / H=26.2 ft
	HS-25 Traffic Loading [in/ft]	d=32 in. / H=14.1 ft	d=22 in. / H=26.1 ft

Product Orientation Guidelines




The Wavin AquaCell has integrated shapes on the top of the base units for visual orientation of the product. A **"cross"** and a **"circle"** shape are meant to be a guide when stacking each of the base units on top of each other in a multi-layer system.

Each stackable base unit will need to be turned 180° to be oriented in the opposite direction of the lower unit underneath. Each of the pillars will fall into position and click in the top of the deck openings of the unit below.

If the unit is not 180° in the opposite direction of the lower section, the units will fall into each other as they are stacked on the shipping pallet.

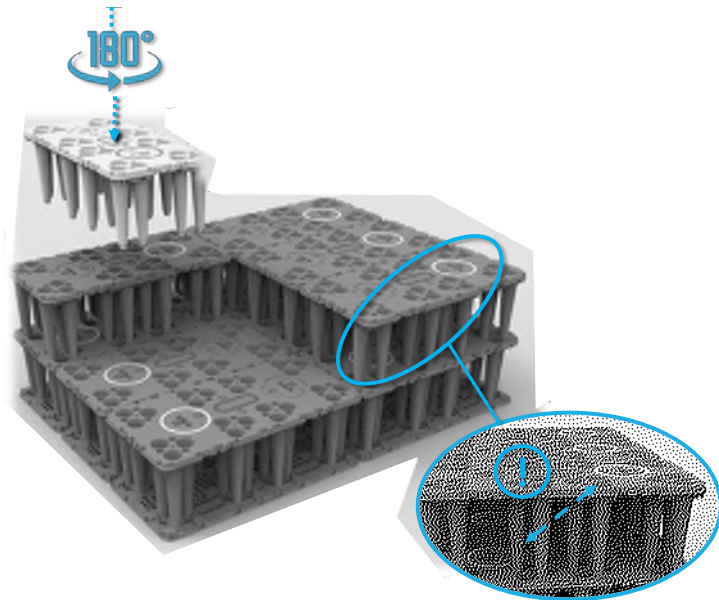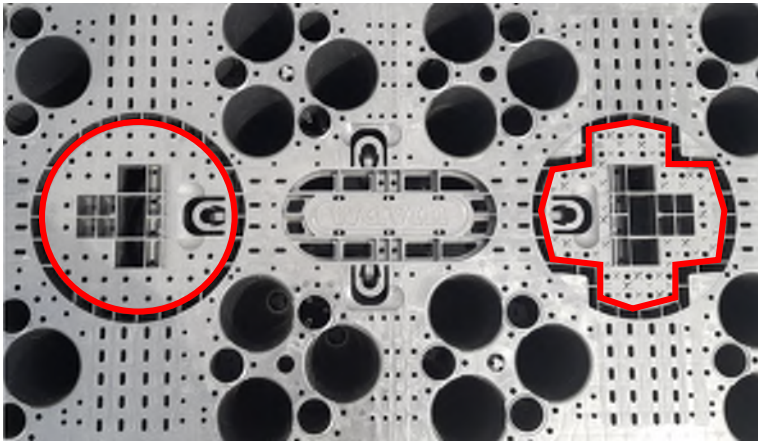


Dimensions

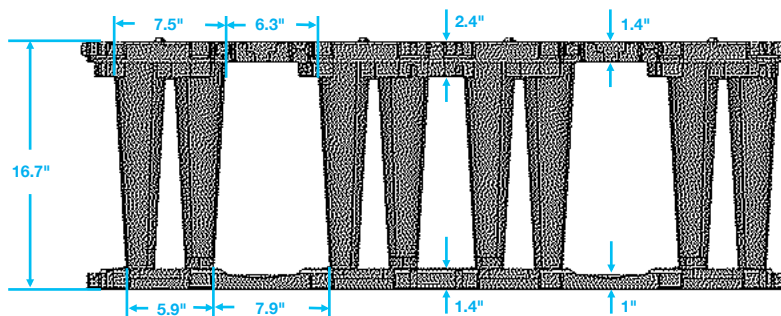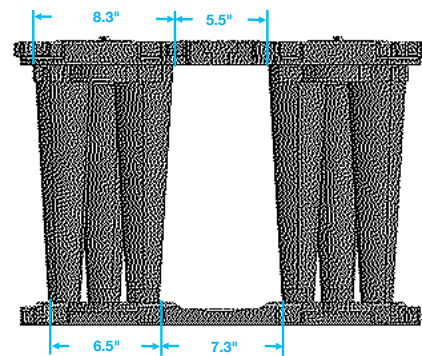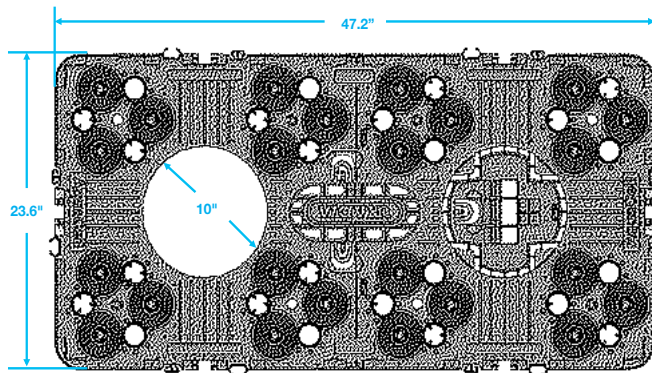

Unloading and Unpacking


Handling by excavator or forklift:

AquaCell base units are stacked 56 units per 4'x4' pallet. The pallets can be lifted with forks on an excavator or forklift by positioning these forks in the openings of the pallets (full pallet stack is separated at 14 units from the top with boards to easily slide the forks in the center of the stack).

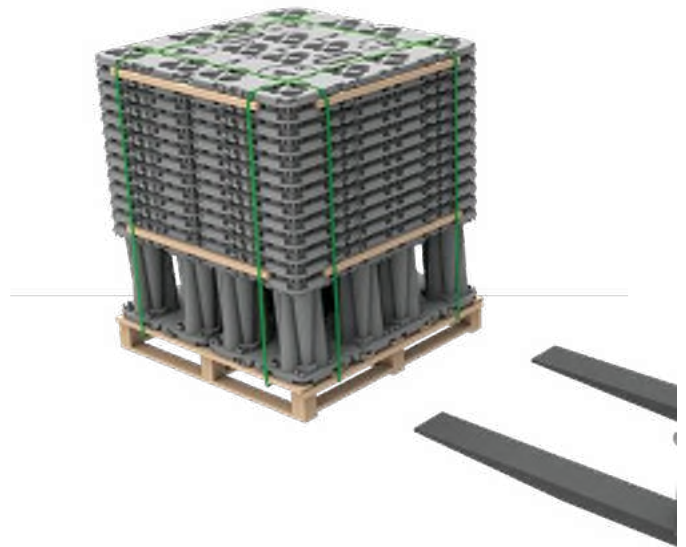

Handling by excavator or forklift:


The pallets can also be lifted with slings positioned as indicated in the pictures. It is important that the sling is long enough that hooks are above the stack, not to damage the products.

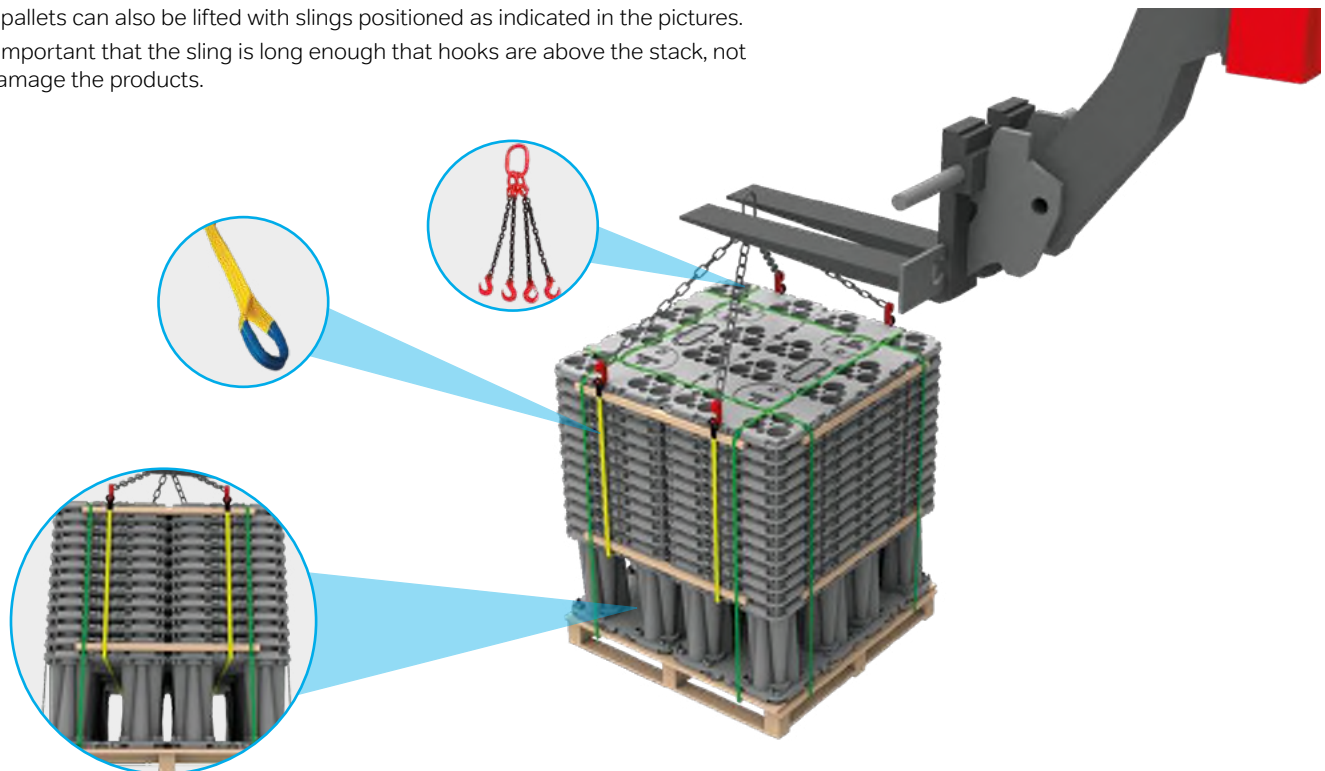

Jobsite delivery Instructions & Transfer of Risk Acknowledgement:

See pages 13-14 included for submission to Wavin Customer Service for AquaCell product warranty act

AquaCell Base unit has a low weight (11.4kg / 25.1lb) and is equipped with integrated handgrips for ergonomics.

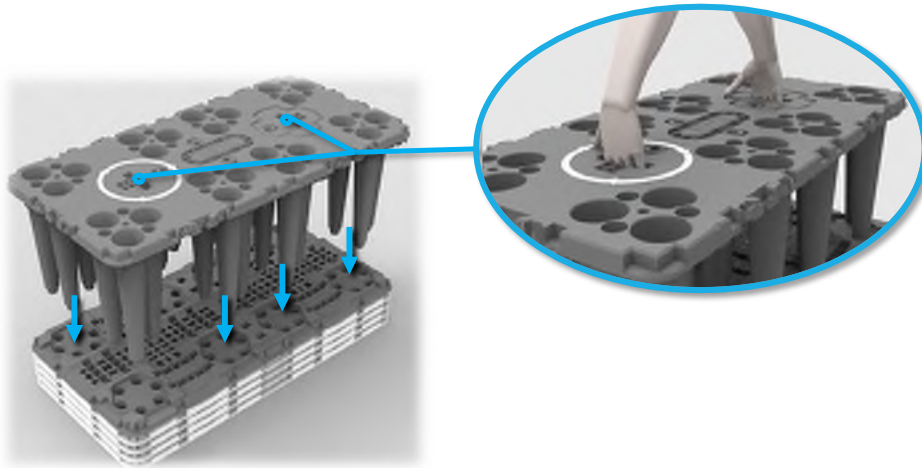

For dismantling of the bottom layer of the stack, pull firmly on one short side of the unit while keeping a foot on the bottom layer.



2. Installation instructions

For the total installation of AquaCell the following steps have to be performed:

Step 1:

Prepare the bottom of the trench with suitable bedding material with a minimum depth of 4in / 10cm (max. 12in / 30 cm).

Remove protruding objects /debris in bedding (e.g. stones) which can damage the geotextile fabric).

Step 2:

Level (screed) the bottom of the trench.

*Sub-base must provide a minimum bearing capacity of 2,000 lbs/sf

Step 3:


Install the non-woven geotextile / geomembrane on the bottom of the trench. Be sure that a minimum overlap of 12in (300mm) is available at each side of the system.

Step 4:

Install and outline (perpendicular) a string guide to ensure a straight system.


Note: Do not punch the geotextile / geomembrane with stakes. Place the stakes outside the highlighted area.

*Note: **12 in. backfill/stone perimeter** is noted as a "**Minimum**" distance only and does not replace or override the **specified** perimeter around the AquaCell Tank as designed by the E.O.R.

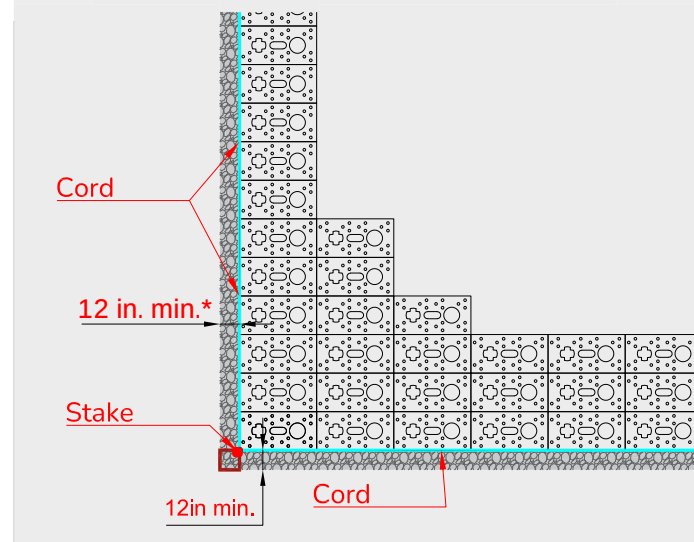

Step 5:

Bottom layer: Mount the bottom plate to AquaCell unit (make sure an audible “click” is heard to ensure a proper connection) and place this unit in the outlined corner on the bottom of the trench.

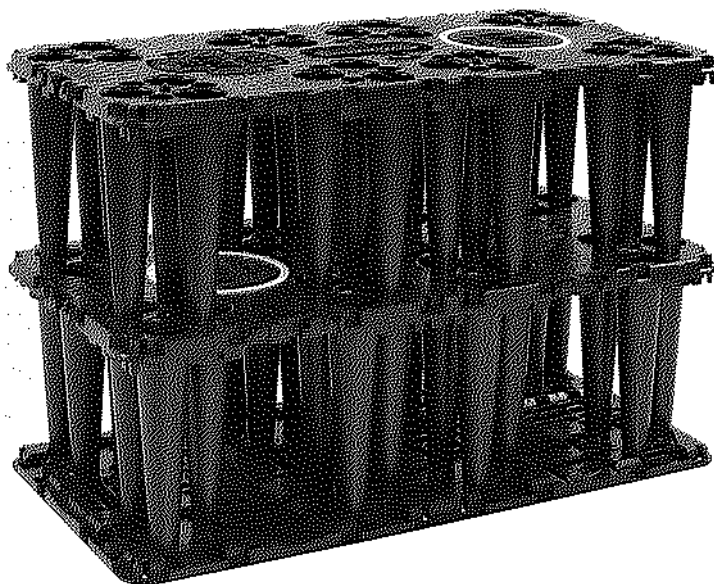

Step 6a:

Bottom layer: Place the next (outer) units (including pre-mounted bottom plates) next to the installed units by sliding the integrated connectors into each other.

Note: Check the orientation of crates, ensuring crosses/circles are in line).

Repeat this until the full bottom layer is installed.

Alternately, bottom plates can be laid out first, with base units installed sequentially from top corner of system moving laterally to end of system boundaries until full bottom layer is installed.

Step 6b:

Vertical inspection ports: When vertical access through the unit is required, the round plate / “Circle” or “Cross” on top of the unit must be cut. The cutting lines are marked by a **“hand saw”** logo. A saw with a blade length of at least 3in / 8cm is required.

Note: Make sure that the round “circle” plate or “cross” of each unit of each layer below the vertical access is cut.



Step 7:

Next layer(s): Mount the base unit (w/o bottom plate) directly on the top deck of bottom layer base unit(s). Each of the pillars will fall into position and click in the top deck openings of the unit below.

Note 1: Keep in mind the orientation of the circles/crosses (circle above circle / cross above cross will drop columns into the lower base unit).

Note 2: The integrated connectors will slide into each other (vertically).

Repeat this for all the layers until all units are installed.



Step 8:

Side plate: The following step is to install the side plates by putting the hinge pins of the side plate into the hinge pockets of the units at an angle. Next, the plates can be hinged against the pillars of the AquaCell unit. The plate will snap to each of the unit. Repeat this step until all side plates are installed and the system is fully closed except at the location where the inlet and outlet must be placed.

Note 1: In case of the need of a half side plate, cut side plate down center (follow guidelines shown on side plate).

Note 2: After cutting there is a left and right version. Be sure that the rounded edge of the half plate is positioned towards the corner of the system (not the cut edge). Depending on the length of the side, put the half plate in between 2 uncut plates.



Step 9a:

Connection ≤ 6 in / 160mm : Each side plate consists two standard 6 in / 160mm Inlets with integrated pipe stopper.

The two sprues of the pipe stopper can be cut/broken to activate this pipe stopper.



Step 10:

Wrap the complete system in geotextile or geomembrane. The unit has a clip to help hold the geotextile during wrapping.

Note: The overlap of the geotextile/membrane should be at least 20in / 500mm.

**Step 11:**

Back fill the trench around the system in lifts of max. 12in / 30cm with the appropriate soil type and compact this evenly until the level of the top inlet.

The appropriate degree of soil compacting should correspond with the existing soil and water conditions and future external load.

It is advised to compact soil at the minimum level of:

- 95 % Standard Proctor (SP) for all traffic loads

In the case of high level of ground water, it is advised to increase the degree of soil compacting to the minimum level of 98 % Proctor (SP)

**Step 12:**


Install pipe inlet/outlets ≤ 15 in using 8-12 in Pipe Connector. Secure the non-woven geotextile / geomembrane to the pipe using flexible rubber coupler, corrosion-resistant mastic tape, or steel hose clamps. Overlap of fabric: 39 in X 39 in / 1m x 1m). Backfill and compact underneath and around the pipe.

Note: For pipe connection ≥ 16 inches, create a **boot** using the geotextile fabric wrapped around the AquaCell tank.



Step 13:

Cut an "X" into the geotextile/geomembrane on top of AquaCell for installation of 12in/16in Top Adapter into upper deck. The 10in (250mm) spigot at the bottom of the top adapter fits into the previously cored hole at the top of the upper base unit. Next, secure the fabric and top adapter with corrosion resistant adhesive tape (or steel hose-clamps). The Top Adapter is ready for installation of vertical inspection pipe (12in adapter use 12in PVC SWR pipe; 16in use 12in HDPE or 18in SCH.40).

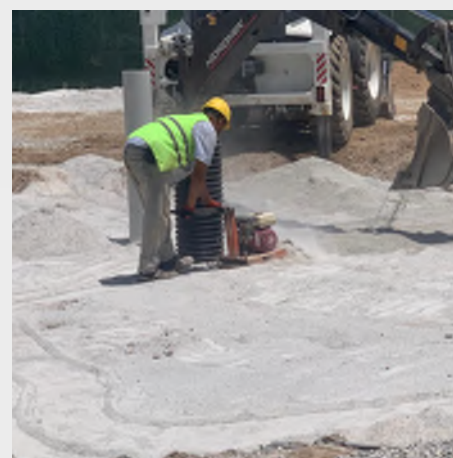**Step 14:**

Backfill the trench around the system in lifts of max. 12in / 30cm with the appropriate soil type and compact this evenly until the top is level with the system (tank).

Note: For the appropriate degree of soil compacting, see step 11.

**Step 15:**

Backfill the trench evenly on top of the system. Compaction begins after 12in of material placement over the AquaCell tank, with subsequent lifts no greater than 12in for well-graded materials or 6in for processed aggregates. Roller gross vehicle weight and dynamic force of construction equipment must not exceed 12,000 and 20,000 pounds, respectively. *Reference AquaCell detail AQ-100-20 pg. 17 for further guidance.


Note: For the appropriate degree of soil compacting, see step 11.


**Step 16:**

Shorten length of vertical pipe from the top adapter (if necessary) and install designated top casting & cover(s) as specified for the application.



3. Universal Installation Instructions

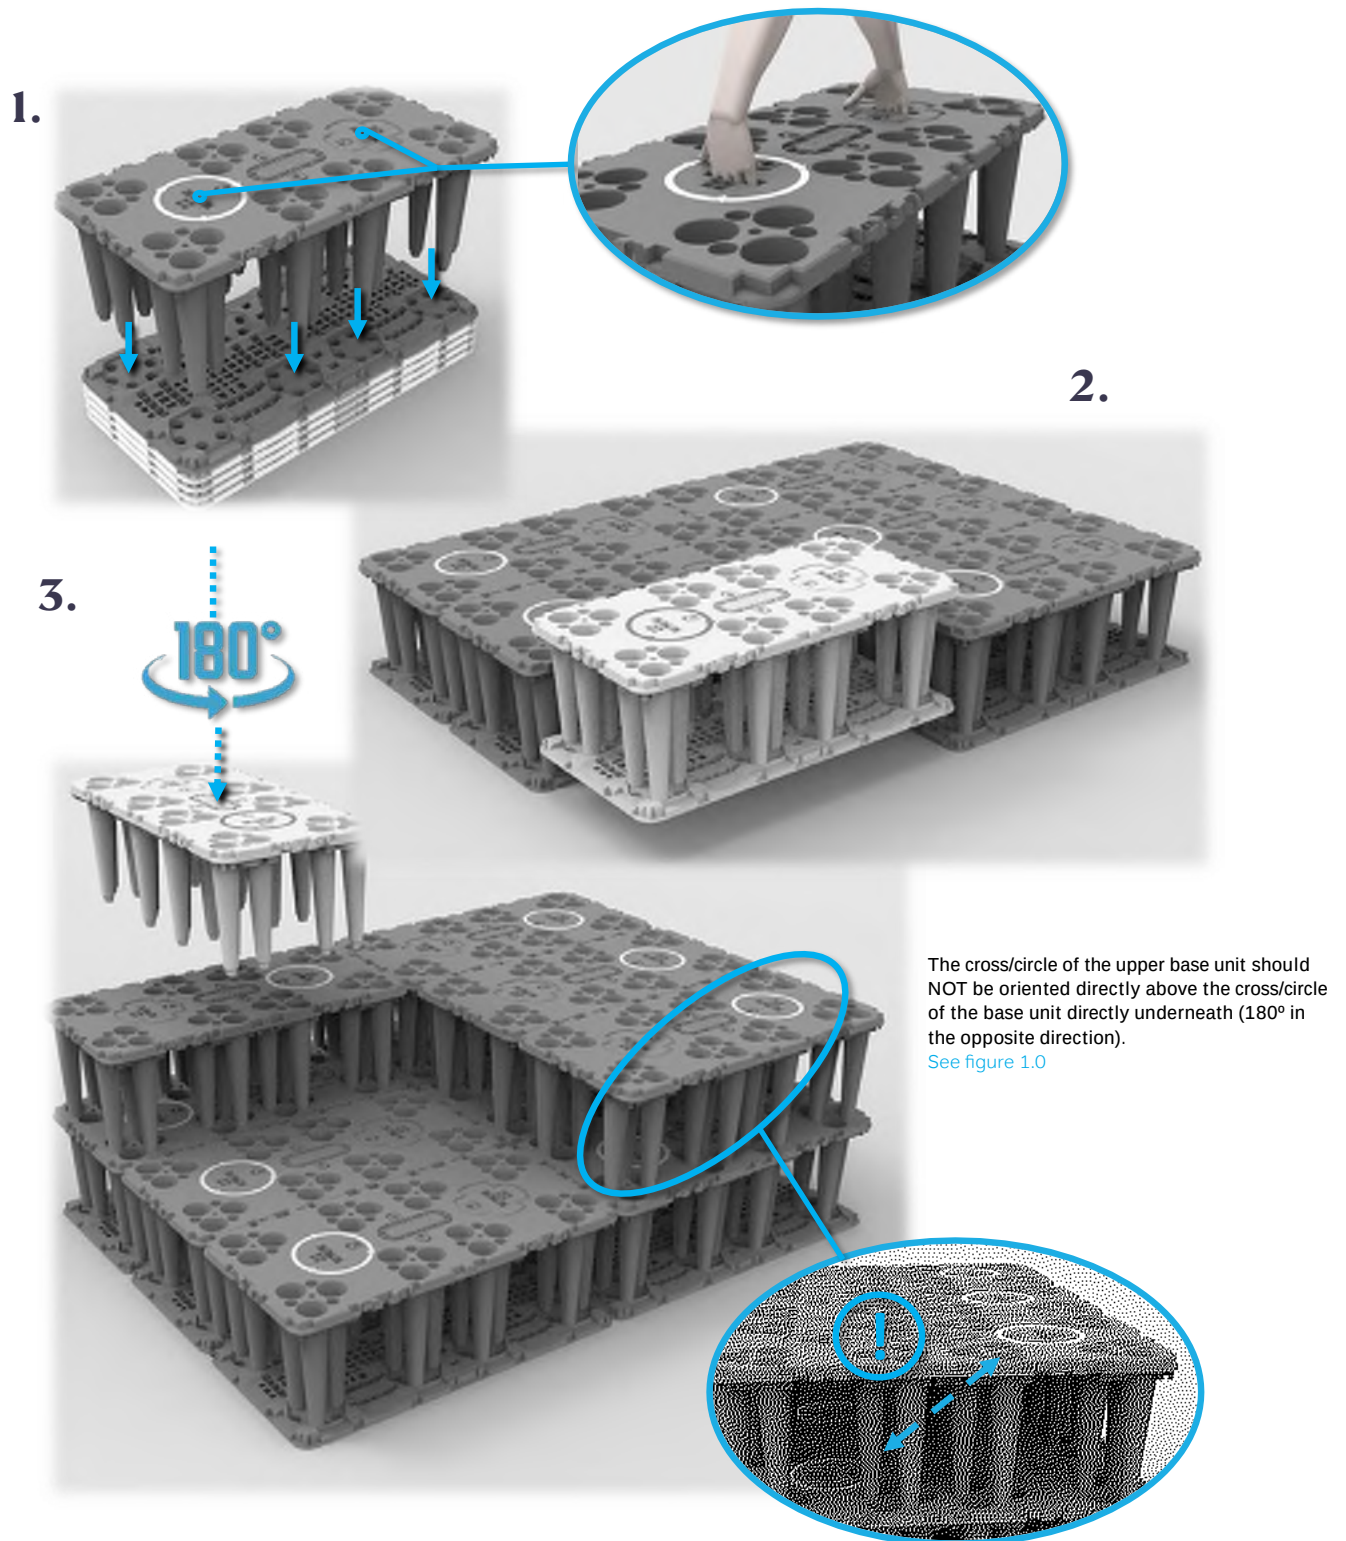

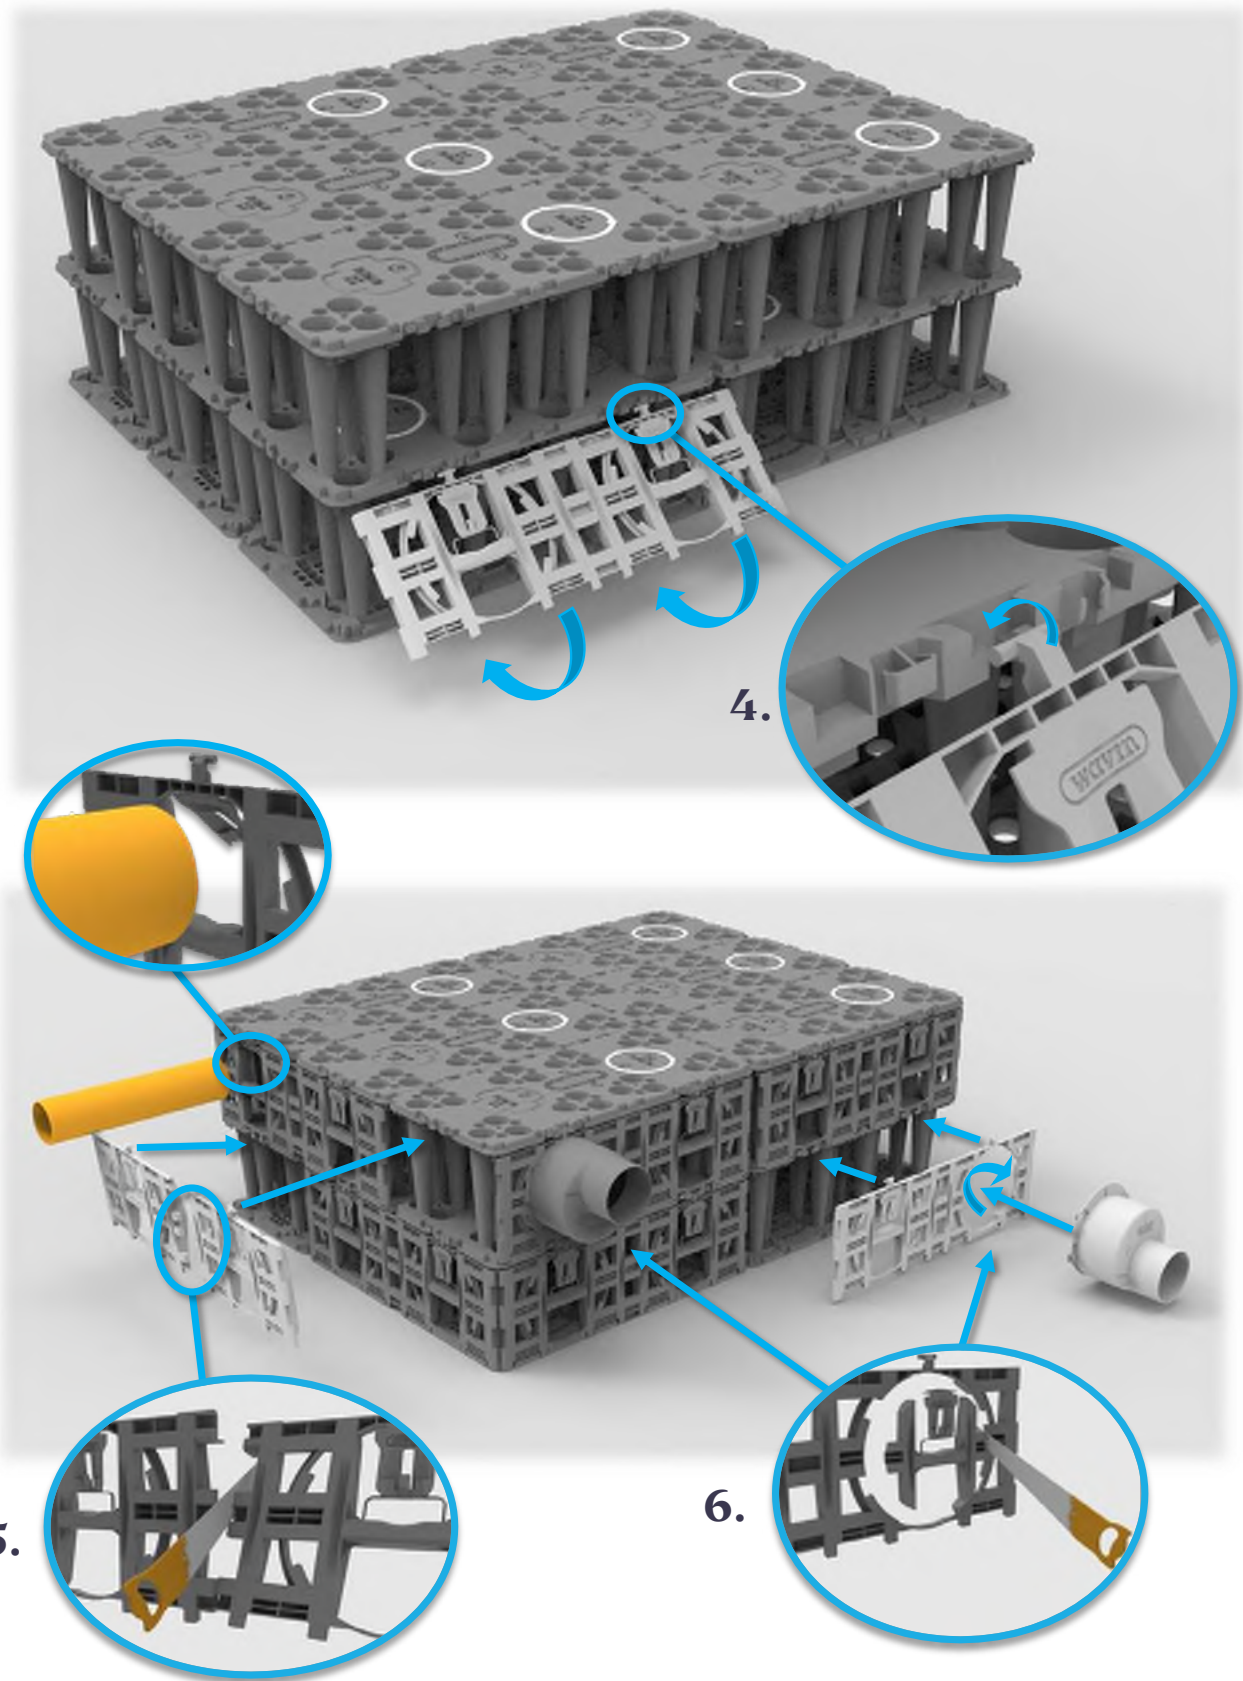

Jobsite Delivery Instructions & Transfer of Risk Acknowledgment

To ensure proper handling and documentation of Wavin products upon delivery to a jobsite, please follow the instructions below. These steps are critical for warranty validation and to confirm the transfer of risk from Wavin to the customer.

1. Pre-Delivery Preparation

- Ensure a designated representative is available on-site to receive the delivery.
- Review the delivery schedule and prepare necessary documentation (e.g., purchase order, delivery note).

2. Delivery Inspection

- Inspect all products immediately upon arrival for visible damage or missing items.
- Take clear photographs of the delivered goods, including packaging and any damage.
- Verify product labels, quantities, and crate integrity.

3. Documentation

- Complete the Delivery Note and Bill of Lading with the carrier.
- Record any discrepancies or damage on the delivery documents and notify Wavin immediately.
- Retain copies of all signed documents and photographs for your records.

4. Acceptance Confirmation

- Sign the Delivery Acceptance Form to confirm receipt and condition of goods.
- Ensure the form includes the delivery date, project name, and product details.
- Note: Signing the form without exceptions confirms acceptance and transfers risk to the customer.

5. Product Storage

- Store products in a clean, dry, and secure area as per Wavin's storage guidelines.
- Protect materials from direct sunlight, moisture, and physical damage until installation.

6. Warranty Activation

- Register the project with Wavin within 30 days of delivery using the provided registration form or online portal.
- Submit all required documentation, including delivery photos, signed acceptance form, and inspection records.

7. Contact Information

- For questions or to report delivery issues, contact Wavin Customer Support at: customer.service@orbia.com.

Delivery Acceptance & Transfer of Risk Form

1. Delivery Details

Project Name: _____

Delivery Date: _____

Delivery Location: _____

Carrier Name: _____

Wavin Product(s) Delivered: _____

Quantity Delivered: _____

Delivery Note Number: _____

2. On-Site Inspection

Visual Inspection Completed: ☐ Yes ☐ No

Any Damage Noted: ☐ Yes ☐ No

If yes, describe the damage:

Photographic Evidence Taken: ☐ Yes ☐ No

3. Acceptance Confirmation

Received By (Client Representative): _____

Signature: _____

Date: _____

4. Transfer of Risk Acknowledgment

By signing this form, the client acknowledges receipt of the above-listed products in acceptable condition and agrees that the risk of loss or damage transfers from Wavin to the client as of the delivery date, unless damage was noted at the time of delivery.

Client Representative Name: _____

This image shows a single sheet of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Discover our broad portfolio at wavin.us

- Water management
- Heating and cooling
- Water and gas distribution
- Waste water drainage



Wavin is part of Orbia, a community of companies working together to tackle some of the world's most complex challenges. We are bound by a common purpose: To Advance Life Around the World.



Wavin operates a program of continuous product development, and therefore reserves the right to modify or amend the specification of their products without notice. All information in this publication is given in good faith, and believed to be correct at the time of going to press. However, no responsibility can be accepted for any errors, omissions or incorrect assumptions.

Wavin 950 Winter Street, South Entrance 1st Floor, Waltham, MA 02451, United States | 5700 Côte de Liesse Montréal, QC H4T 1B1
Phone CAN 514-735-7585 / 1800-561-1169 | US 514-735-3632 / 1800-763-3632 | E-mail wavin.northamerica@wavin.com | wavin.us

©2025 Wavin Wavin reserves the right to make alterations without prior notice. Due to continuous product development, technical specifications may change. Installation must comply with the instructions provided.