




- NOTES:**
- Recommended fill method is with an excavator < 23 US tons from outside the AquaCell system.
 - Tracked excavators outside the excavated hole should be used to place fill over the AquaCell system when the geotextile/geomembrane wrapping has been completed.
 - No compaction equipment is permissible to operate directly on the AquaCell units.
 - Backfill the first 12" layer with an excavator and compact with a manual vibration plate or small smooth vibrating drum roller (static mode only) weighing no more than 6 US tons.
 - Minimum 24" backfill cover over AquaCell system when any smooth vibrating drum roller is in vibratory mode.
 - Fill should be compacted as required with no loose fill. Recommended compaction is 90% standard proctor (SP) for non-traffic, 95% SP for light/limited traffic, 98% SP for heavy traffic.
 - Dozers that can be used with 12" of backfill cover must have contact pressure < 7.0 psi with an operating weight < 10 US tons.
 - 24" of well compacted backfill over the top of the AquaCell system must be in place before any heavy equipment up to 11 US tons maximum may operate over the top of the AquaCell.
 - Reference **Acceptable Backfill Materials Table (AQ-100-01)** for additional guidance on fill material.
 - Reference **Installation Depth Requirements (AQ-100-02)** for additional guidance on load, depth, and compaction requirements.

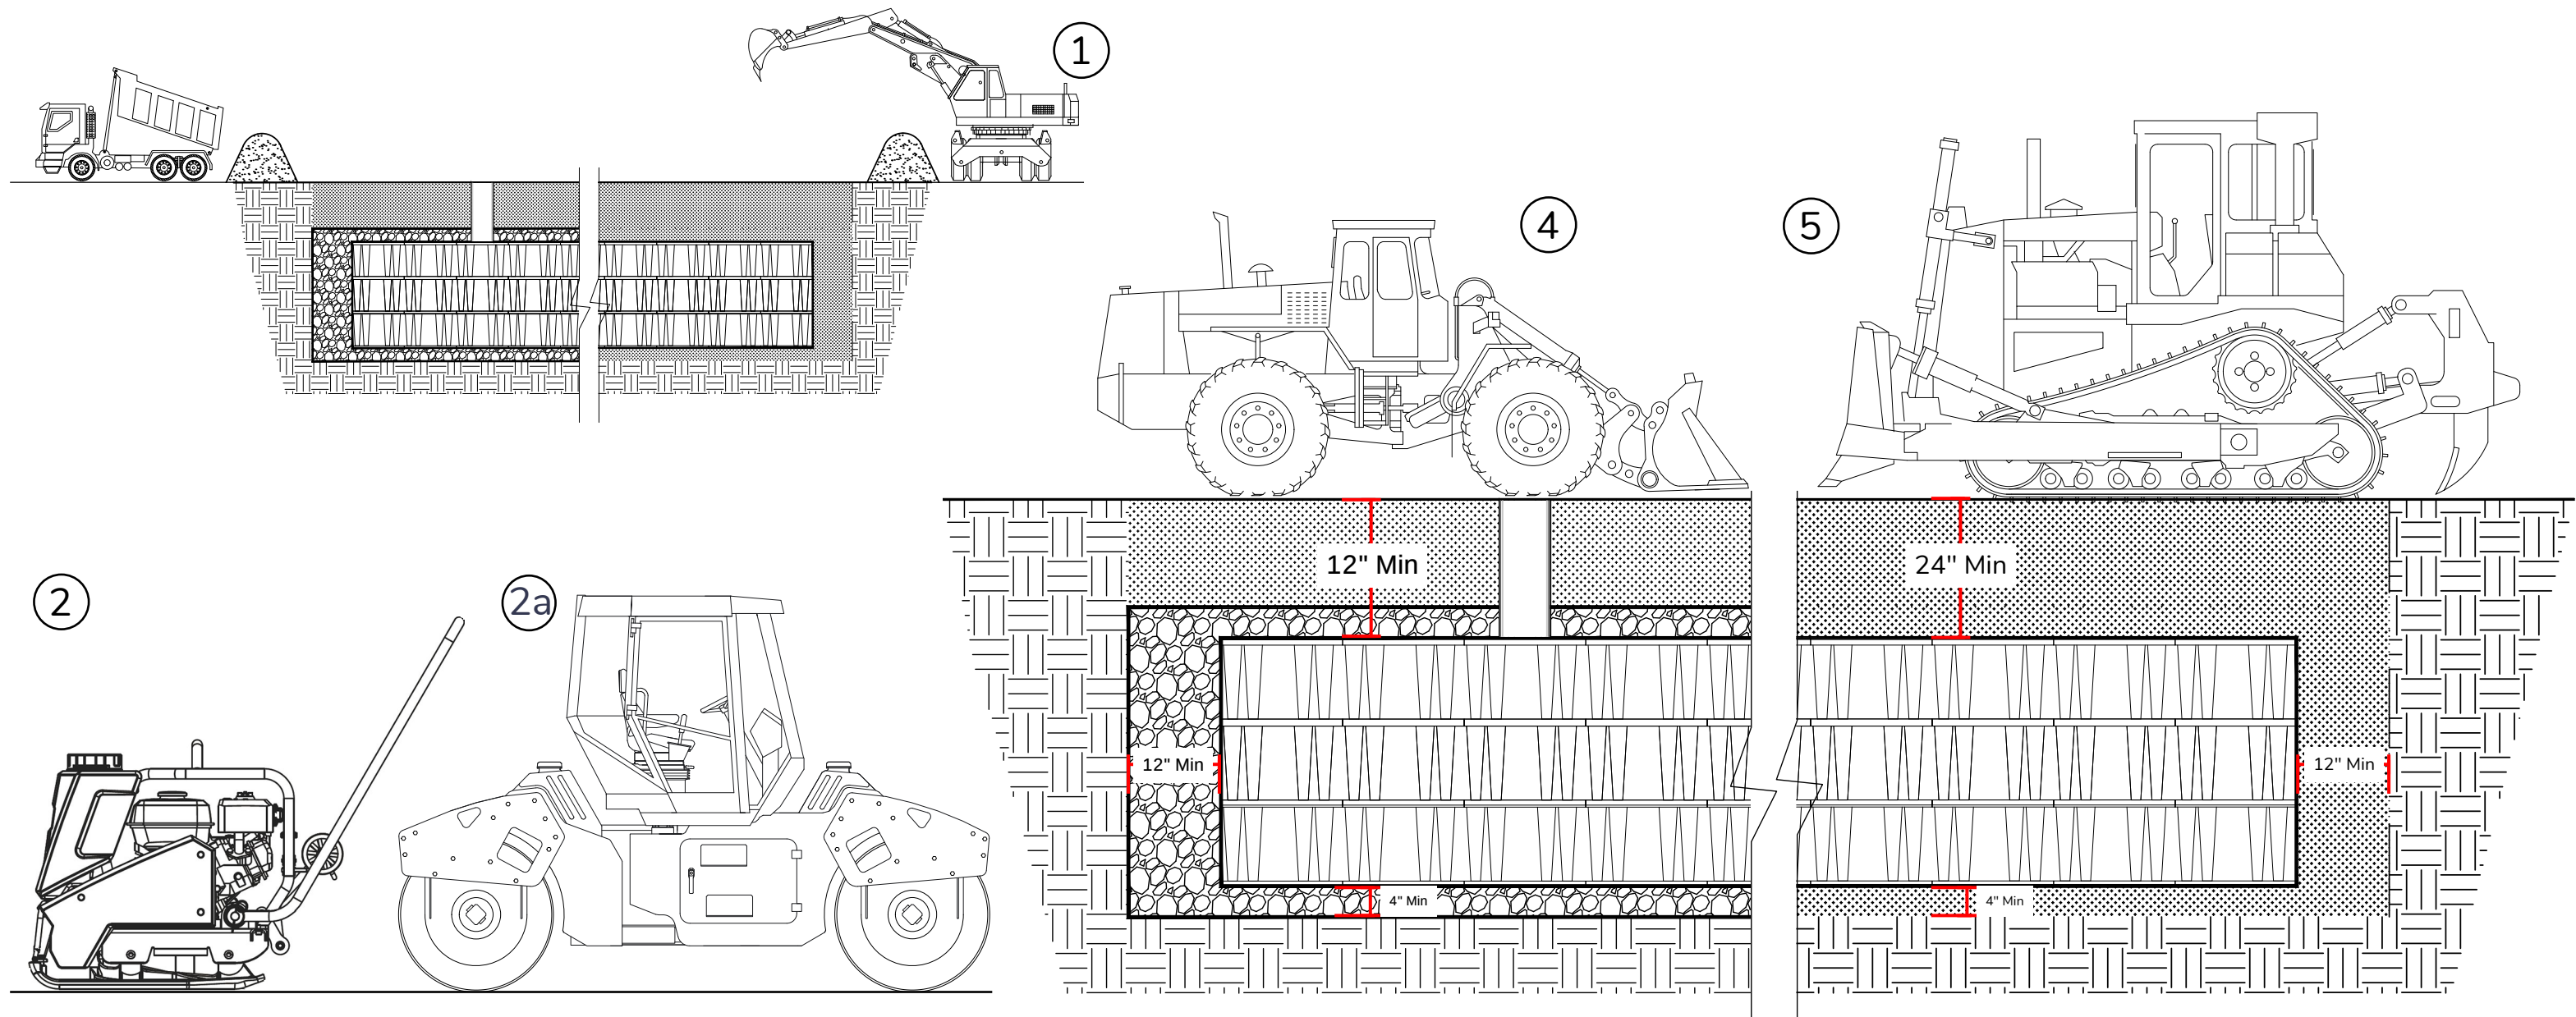

Managing water better since 1955.
950 Winter Street
Waltham, MA 02451
wavin.us.com
wavintechsupport@orbia.com

Title: Construction Loads over AquaCell System

The design details/specifications presented in this document are for informational & reference purposes only and are subject to change without notice. Responsibility for design of any AquaCell system rests solely with the original design engineer of record. For questions, contact: wavintechsupport@orbia.com.	Drawn by: HJD	Approved by: KS	Sheet <u>1</u> of <u>1</u>
	Scale: NTS	Revision: 0	
	AQ-100-20	Date: 8/6/2024	